



Short Basic Harness

Item # BC1063Short

This harness utilizes nylon webbing for strength and comfort. It also features tubular webbing sleeves to minimize wear wherever the harness would normally be in contact with a metal backplate.

This Dive Rite Harness fits on all Dive Rite backplates, and is designed for shorter torsos.

Packaging contains:

- 1) 9 ft of 2” harness webbing
- 2) 4 tubular sleeves (3.5” each)
- 3) 4 Stainless-steel Belt Slides
- 4) 2 Stainless-steel D-rings
- 5) 2 Stainless-steel bent D-rings
- 6) 1 Stainless-steel waist-strap release buckle

Great for technical diving,
where simplicity is
the key!

*** * Crotch Strap not included * ***

© 2010, Lamartek, Inc. dba Dive Rite


175 NW Washington Street

Lake City, FL 32055 USA


www.diverite.com

v1.1



Threading Short Basic Harness

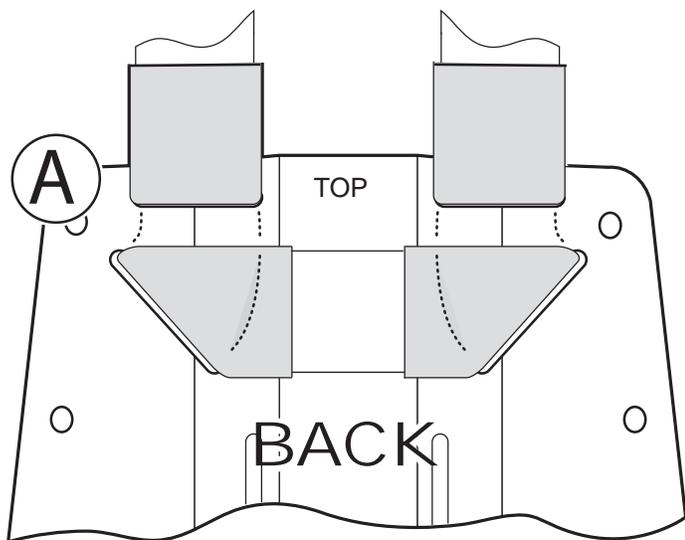

Shoulder Strap Routing

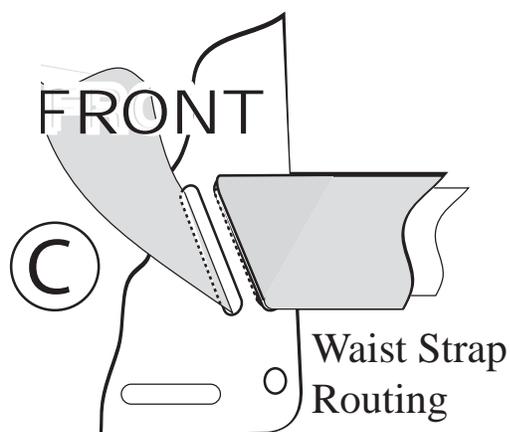

Waist Strap Routing

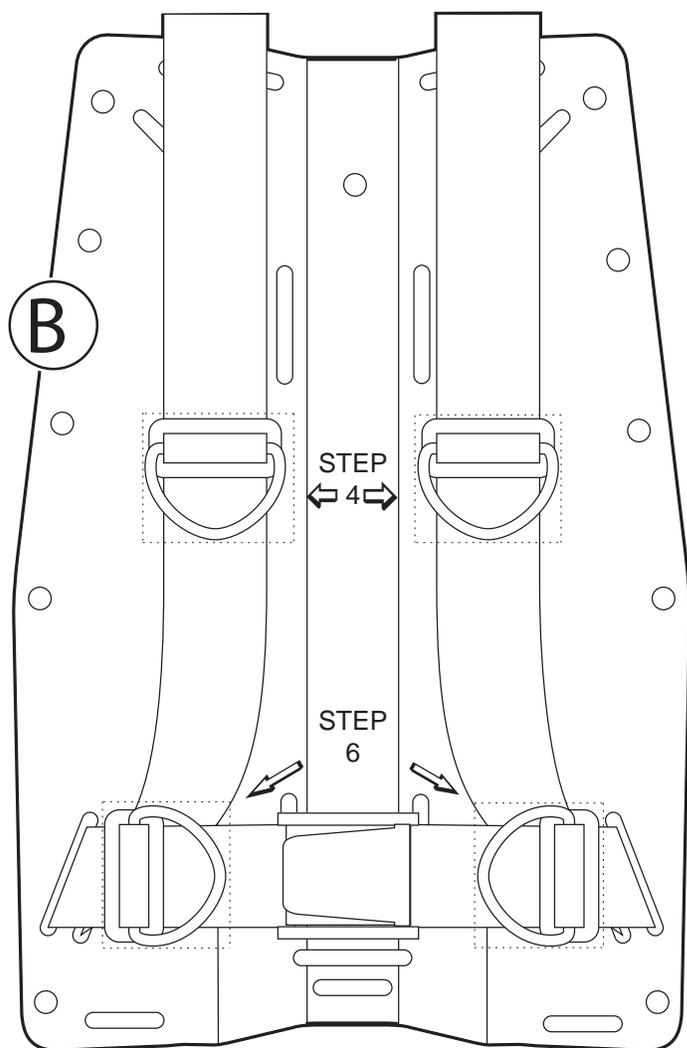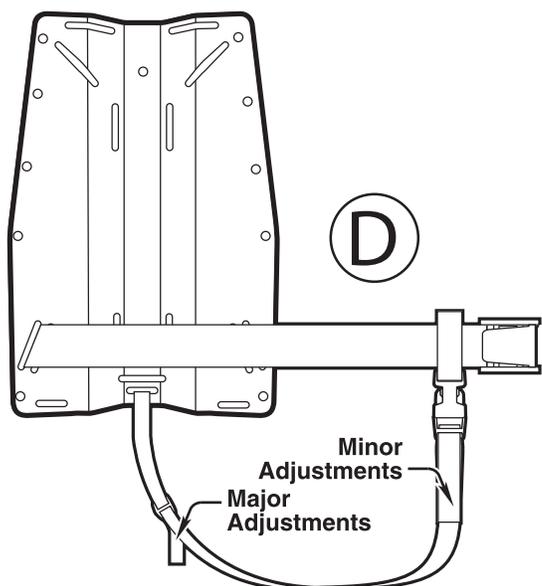

- 1) Begin by threading 2 tubular sleeves onto the harness webbing. These will end up where the harness goes through the upper shoulder strap slots, as shown in figure A.
- 2) Thread the harness webbing through the upper shoulder strap slots (figure A), positioning the webbing so it is evenly distributed on each side of the plate.
- 3) Thread the remaining 2 tubular sleeves onto the harness webbing, ending up where the harness goes through the waist slots, as shown in figure C.
- 4) Install one 2" belt-slide and one 2" bend D-ring on each side of the webbing, as shown in figure B.
- 5) Then thread one tail of the webbing through the waist slot (back through the inner slot, then forward through the outer slot). Repeat this step for the opposite tail (see figure C).
- 6) Again install one 2" belt-slide and one 2" D-ring on each side of the webbing, as shown in figure B.
- 7) Locate and install crotch strap. Refer to Figure D.
- 8) Using same side as the crotch strap loop, install waist strap release buckle using slots on buckle.